

SD370 Tropical mains fed shower




Manufactured from either galvanised carbon steel protected by green enamel or stainless steel, these combination units drain down after use and are ideal for hot climates.

Available for non hazardous and hazardous areas. ATEX & GOST Certified.

KEY FEATURES

- 2-3 bar water supply pressure recommended
- Self draining unit
- 1 1/4" BSPF inlet as standard (flanged inlets available as an option)
- Hand operation (foot operation optional)
- Testing lever
- Overhead shower rose - 76lpm @ 2 bar
- Open eyebath with twin nozzles & dust cover - 11lpm @ 2 bar
- Eyebath flow regulator
- 1 1/4" BSPF outlet
- Manufactured to ANSI Z358.1-2009 specifications

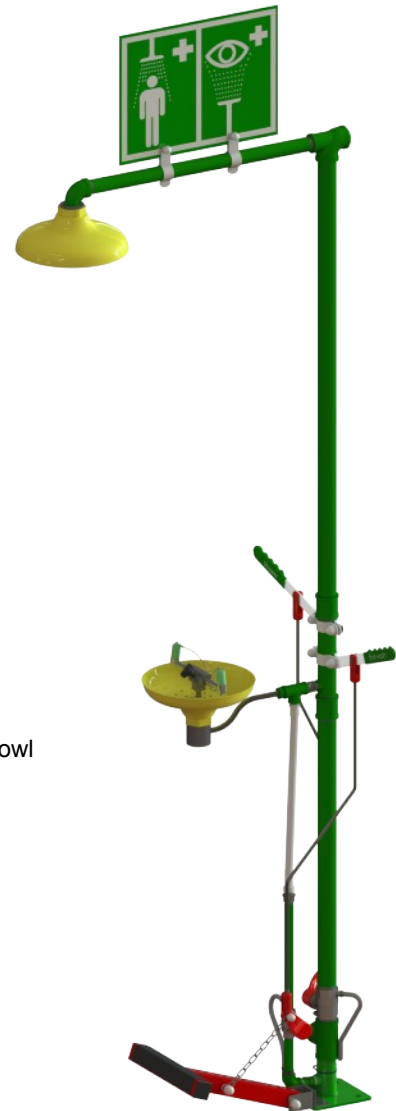

Models available

SD370 - as above - galvanised pipework, brass valves & plastic rose & eyebath bowl

SDS370 - as above - stainless steel pipework, valves, rose & eyebath bowl

Optional Extras		
Remote alarms	Alarm & Siren	Flanged Inlets
Shower walk on Platform	Scald Valve	Eyebath foot treadle
Pendant Lamp	Strainer	Pressure reg.valve



Certificate No. 6974

nooddouches.nl

Robbertsmatenstraat 15
8081 HL Elburg - Netherlands
Web: www.nooddouches.nl

Tel: +31 (0)525-686822
Fax: +31 (0)525-686133
Email: info@nooddouches.nl